


Technical Sheet


CLR Plus SK
Countersunk Concrete Screws

The countersunk head is often used when the screw must remain flush with the object to be fixed, for aesthetical reasons or to avoid intereferences above it.

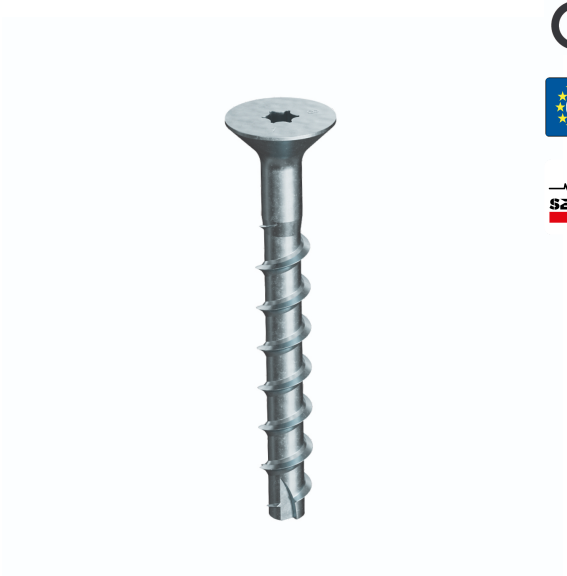







Applications

Material

- Electro-galvanized steel

Suitable on

- Cracked and uncracked concrete

Technical Data

Product dimensions

Viite	Metallic fixings dimensions							
	Tuotenumero	Muu						Mitat ja ominaisarvot[mm]
		Reiän halkaisija [d_o][mm]	Fixing thickness (tfix) for reduced embedment depth (hef,r)	Kiinnikkeen paksuus [tf_{ix}] (1)[mm]	Fixing thickness (tfix) for increased embedment depth (hef,max)	Määrä / pakkaus[pcs]	Määrä per ulkolaatikko	Dim[mm]
CLR Plus SK 5x40	72107B0504000	5	5	-	-	100.0	400	5x40
CLR Plus SK 5x60	72107B0506000	5	25	-	-	100.0	1000	5x60
CLR Plus SK 6x40	72107B0604000	6	5	-	-	100.0	400	6x40
CLR Plus SK 6x60	72107B0606000	6	25	20	5	100.0	400	6x60
CLR Plus SK 6x80	72107B0608000	6	45	40	25	100.0	400	6x80
CLR Plus SK 8x80	72107B0808000	8	35	25	15	50.0	200	8x80
CLR Plus SK 8x100	72107B0810000	8	55	45	35	50.0	200	8x100
CLR Plus SK 10x90	72107B1009000	10	35	15	5	50.0	200	10x90
CLR Plus SK 10x100	72107B1010000	10	45	25	15	50.0	200	10x100

Special order item. Please contact Customer Service for further information.

Copyright by Simpson Strong-Tie®
Tämän materiaalin tiedot ovat yksinomaan Simpson Strong-Tie:n © omaisuutta
Tiedot ovat voimassa ja käytettävissä ainoastaan Simpson –Strong-Tie:n © tuotteita käytettäessä.