
Technical Sheet

CLR Plus SK ZF

Countersunk Concrete Screws Zinc-Flake Coated

The zinc-flake coated countersunk head screw is often used when a coated screw is preferred in applications where the screw must remain flush with the object, for aesthetical reasons or to avoid interferences above it.

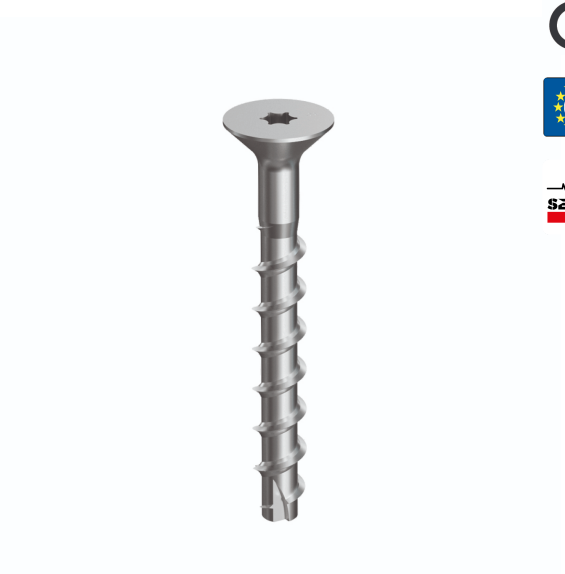

Applications

Material

- Zinc-flake coated steel

Suitable on

- Cracked and uncracked concrete

Technical Data

Product dimensions

Viite	Metallic fixings dimensions							
	Tuotenumero	Muu						Mitat ja ominaisarvot[mm]
		Reiän halkaisija [d_o][mm]	Fixing thickness (tfix) for reduced embedment depth (hef,r)	Kiinnikkeen paksuus [tfi_x] (1)[mm]	Fixing thickness (tfix) for increased embedment depth (hef,max)	Määrä / pakkaus[pcs]	Määrä per ulkolaatikko	Dim[mm]
CLR Plus SK ZF 6x80	72107C0608000	6	45	40	25	100.0	400	6x80
CLR Plus SK ZF 6x100	72107C0610000	6	65	60	45	100.0	400	6x100
CLR Plus SK ZF 6x120	72107C0612000	6	85	80	65	100.0	400	6x120

Simpson Strong-Tie / Gbo Fastening Systems AB
Bruksvägen 2, 593 75 Gunnebo
tel: 0490-300 00
fax : 0490-233 00
Copyright by Simpson Strong-Tie®
Tämän materiaalin tiedot ovat yksinomaan Simpson Strong-Tie:n © omaisuutta