

TT Puukuitu-teräsruuvi

The TT wood fibre board screws are used indoors for fastening OSB, chipboard and Plywood to substrates made of steel with a maximum thickness of 1.0 mm. The sharp point efficiently penetrates the substrate, and the twin thread enables a quick mounting.

Features


Features

- PH-käyttö
- Upotettu pää ja ripat
- Terävä kärki
- Kaksoiskierre
- Fosfatoitu pinnoite

Applications

Suitable for


- Puukuitulevy teräkseen

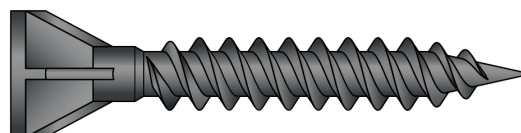

TT
Puukuitu-teräsruuvi

Technical Data

Mitat ja ominaisarvot



Viite	Mitat						
	Tuotenumero	Muu	Mitat ja ominaisarvot[mm]				
		Paino[kg]	D[mm]	L[mm]	dh[mm]	lg[mm]	Bit[mm]
TT3.9X28	74391	0.002	3.9	28	7	21.5	PH2

TT-kierretulpat

Viite	Mitat					
	Tuotenumero	Mitat ja ominaisarvot[mm]				
		D[mm]	L[mm]	dh[mm]	lg[mm]	Bit[mm]
TT3.9X28 Collated	74390	3.9	28	7	21.5	PH2

