

## Technical Sheet

**SIMPSON**

**Strong-Tie**

RSN17Z

**Ring Shank Nail 17° Plastic strip - Round head**

*The framing nail is used for wood to wood constructions. The round head gives a good visual end result and the plastic collation is not sensitive for wetness.*

### Features


#### Ominaisuudet:

- Pyöreä pää
- Renkaan varsi lisää vetolujuutta
- Muovinauha 17°

### Applications

#### Sovellus

- Puiden kehystys

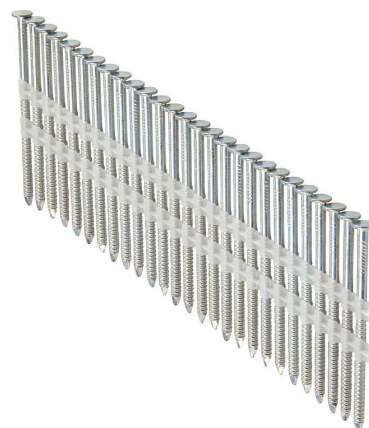

RSN17Z

Ring Shank Nail 17° Plastic strip - Round head

## Technical Data

Mitat

| Viite        | Mitat       |     |                           |                |
|--------------|-------------|-----|---------------------------|----------------|
|              | Tuotenumero | Muu | Mitat ja ominaisarvot[mm] |                |
| RSN17Z3.1x65 | 75          |     | $l_p$ [mm]                | $t_{fix}$ [mm] |
|              |             |     | 4.3                       | 40.2           |

Mitat

See full table online →



Tuotteen ominaisuudet

| Viite        | Nail characteristic parameters              |                                                                |                                                             |                                                |                                             |             |
|--------------|---------------------------------------------|----------------------------------------------------------------|-------------------------------------------------------------|------------------------------------------------|---------------------------------------------|-------------|
|              | Tyypillinen vääntölujuus - $f_{tor,k}$ [Nm] |                                                                |                                                             |                                                |                                             |             |
|              | Taivutuslujuus - $M_{y,k}$ [Nm][Nm]         | Tyypillinen vetoparametri - $f_{ax,k,90^\circ}$ [N/mm²][N/mm²] | Tyypillinen läpivetoparametri - $f_{head,k}$ [N/mm²][N/mm²] | Tyypillinen vetolujuus - $f_{tens,k}$ [kN][kN] | Tyypillinen vääntölujuus - $f_{tor,k}$ [Nm] | Vääntösuhde |
| RSN17Z3.1x65 | 4.6                                         | 8.3                                                            | 18.1                                                        | 3.8                                            | -                                           | -           |

