
Technical Sheet


CLNC0G


Verhousnaula 0° muovikela - pyöreä pää, rengassanka - HDG

Cladding nail is mainly used for painted facades. The length of the cladding nail is developed to not penetrate the wind shield/protection behind the facade and the flat head covers the opened wood fibre after insertion. The ring shank increase the withdrawal performance and the 60 degree diamond point prevents splitting.



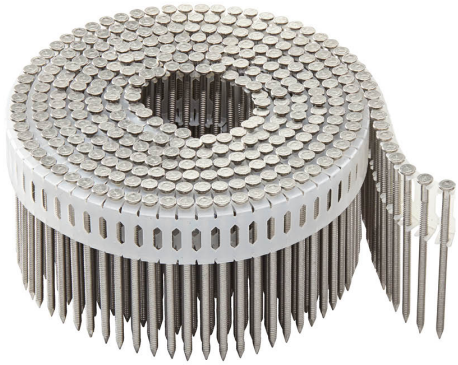





Features

Advantages

- Pyöreä pää
- 60 asteen timanttikärki
- Renkaankantainen varsi
- Muovikela 0°

Applications

Support

- Verhous/julkisivupuu puuhun

CLNC0G
Verhousnaula 0° muovikela - pyöreä pää, rengassanka - HDG

Technical Data

Product dimensions

Viite	Mitat														
	Tuotenumero	Muu				Mitat ja ominaisarvot[mm]								lg[mm]	l_p[mm]	tfix[n
CLNC0G2.8X48	75													≥ 32	2.5	25.
CLNC0G2.8X65	75													≥ 43	2.5	42.

Product dimensions
See full table online ➡️

Product characteristic properties

Viite	Nail characteristic parameters					
	Tyypillinen vääntölujuus - $f_{tor,k}$ [Nm]					
	Taivutuslujuus - My,k[Nm]	Tyypillinen vetoparametri - $f_{ax,k,90°}$[N/mm²]	Characteristic Head Pull-Through Parameter fhead,k[N/mm²]	Tyypillinen vetolujuus - $f_{tens,k}$[kN]	Tyypillinen vääntölujuus - $f_{tor,k}$[Nm]	Vääntösuhde
CLNC0G2.8X48	3.2	8.9	29.4	3.4	-	-
CLNC0G2.8X65	3.2	8.9	29.4	3.4	-	-

Simpson Strong-Tie / Gbo
Fastening Systems AB
Bruksvägen 2, 593 75 Gunnebo
tel: 0490-300 00
fax : 0490-233 00
Copyright by Simpson Strong-Tie®
Tämän materiaalin tiedot ovat yksinomaan Simpson Strong-Tie:n © omaisuutta