

Technical Sheet

CLNC0A4

Verhousnaula 0° muovikela - pyöreä pää, rengassanka - ruostumaton teräs A4

SIMPSON

Strong-Tie

Cladding nail is mainly used for painted facades. The length of the cladding nail is developed to not penetrate the wind shield/protection behind the facade and the flat head covers the opened wood fibre after insertion. The ring shank increase the withdrawal performance and the 60 degree diamond point prevents splitting.

Features


Advantages

- Pyöreä pää
- 60 asteen timanttikärki
- Renkaankantainen varsi
- Muovikela 0°
- Ruostumaton A4

Applications

Support

- Verhous/julkisivupuu puuhun

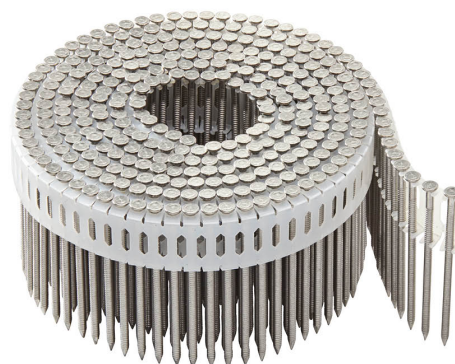

CLNC0A4

Verhousnaula 0° muovikela - pyöreä pää, rengassanka - ruostumaton teräs A4

Technical Data

Product dimensions

Viite	Mitat			
	Tuotenumero	Muu	Mitat ja ominaisarvot[mm]	
CLNC0A42.8X48	7		lg[mm]	lp[mm]
CLNC0A42.8X65	7		lg[mm]	lp[mm]

Product dimensions

See full table online [→](#)



Product characteristic properties

Viite	Nail characteristic parameters					
	Tyypillinen vääntölujuus - $f_{tor,k}$ [Nm]					
	Taivutuslujuus - $M_{y,k}$ [Nm]	Tyypillinen vetoparametri - $f_{ax,k,90^\circ}$ [N/mm ²]	Characteristic Head Pull-Through Parameter $f_{head,k}$ [N/mm ²]	Tyypillinen vetolujuus - $f_{tens,k}$ [kN]	Tyypillinen vääntölujuus - $f_{tor,k}$ [Nm]	Vääntösuhde
CLNC0A42.8X48	3.2	8.9	29.4	3.4	-	-
CLNC0A42.8X65	3.2	8.9	29.4	3.4	-	-

