

Technical Sheet

CLNC15A4

Verhousnaula 15° muovikela - pyöreä pää, rengassanka - ruostumaton A4

SIMPSON

Strong-Tie

Cladding nail is mainly used for painted facades. The length of the cladding nail is developed to not penetrate the wind shield/protection behind the facade and the flat head covers the opened wood fibre after insertion. The ring shank increase the withdrawal performance and the 60 degree diamond point prevents splitting.

Features


Advantages

- Pyöreä pää
- 60 asteen timanttikärki
- Renkaankantainen varsi
- Muovikela 15°

Applications

Support

- Verhous/julkisivupuuhun

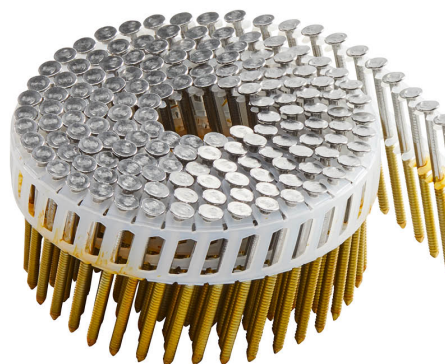

Technical Sheet

SIMPSON

Strong-Tie

CLNC15A4

Verhousnaula 15° muovikela - pyöreä pää, rengassanka - ruostumaton A4

Technical Data

Product dimensions

Viite	Mitat			
	Tuotenumero	Muu	Mitat ja ominaisarvot[mm]	
CLNC15A42.8X48			lg[mm]	lp[mm]
CLNC15A42.8X65			50	2.5
CLNC15A42.8X75			53	2.5

Product dimensions

See full table online [→](#)



Product characteristic properties

Viite	Nail characteristic parameters					
	Tyypillinen vääntölujuus - $f_{tor,k}$ [Nm]					
	Taivutuslujuus - $M_{y,k}$ [Nm]	Tyypillinen vetoparametri - $f_{ax,k,90^\circ}$ [N/mm ²]	Characteristic Head Pull-Through Parameter $f_{head,k}$ [N/mm ²]	Tyypillinen vetolujuus - $f_{tens,k}$ [kN]	Tyypillinen vääntölujuus - $f_{tor,k}$ [Nm]	Vääntösuhde
CLNC15A42.8X48	3.2	8.9	29.4	3.4	-	-
CLNC15A42.8X65	3.2	8.9	29.4	3.4	-	-
CLNC15A42.8X75	3.2	8.9	29.4	3.4	-	-

Simpson Strong-Tie / Gbo
Fastening Systems AB
Bruksvägen 2, 593 75
Gunnabo
tel: 0490-300 00
fax : 0490-233 00
Copyright by Simpson Strong-Tie®
Tämän materiaalin tiedot ovat yksinomaan Simpson Strong-Tie:n © omaisuutta
Tiedot ovat voimassa ja käytettävissä ainoastaan Simpson Strong-Tie:n © tuotteita käytettäessä.

CLNC15A4
Verhousnaula 15° muovikela - pyöreä pää, rengassanka - ruostumaton A4



www.strongtie.fi

SIMPSON
Strong-Tie

2026-10-30