

Technical Sheet

SIMPSON

Strong-Tie

FSB Protec

Wafer Head Steel Screw - Drill Point - Protec+

Used to fix external board materials such as plasterboard and fibre cement board to steel joists up to 2.0 mm in thickness.

Features


Features

- Ristipisteveto
- Vihreä pää
- Porakärki
- Metallinen kierteitys
- Protec+ pinnoite

Applications

Suitable for

- Teräs teräkseen
- Kuitusementtilevy teräkseen
- Puukuitulevy teräkseen
- Kipsilevy teräkseen

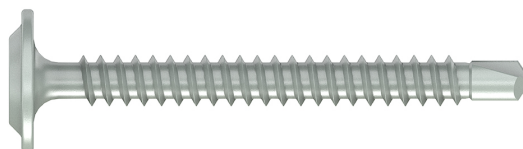


Technical Sheet

SIMPSON**Strong-Tie®**

FSB Protec

Wafer Head Steel Screw - Drill Point - Protec+

Technical Data

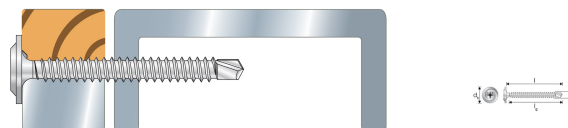

Mitat

Viite	Mitat					
	Tuotenumero	Muu	Mitat ja ominaisarvot[mm]			
		Paino[kg]	D[mm]	L[mm]	d _h [mm]	Bit[mm]
FSB4.2X13 PROTEC	74412	0.002	4.2	13	11.5	PH2
FSB4.2X25 PROTEC	74409	0.002	4.2	25	11.5	PH2
FSB4.2X32 PROTEC	74408	0.003	4.2	32	11.5	PH2

Simpson Strong-Tie / Gbo Fastening
Systems AB
Bruksvägen 2, 593 75 Gunnebo
tel: 0490-300 00
fax : 0490-233 00

Copyright by Simpson Strong-Tie®

Tämän materiaalin tiedot ovat yksinomaan Simpson Strong-Tie:n © omaisuutta

FSB Protec

**Wafer Head Steel Screw - Drill Point
- Protec+**www.strongtie.fi**SIMPSON****Strong-Tie®**